

The Isuzu F-SERIES combines power and comfort with the latest diesel engine technology, making sure your business moves forward with higher gains.

The Isuzu F-SERIES has everything your business needs and more, from the brand known for producing strong, trusted and reliable vehicles for almost 100 years.

ISUZU F-SERIES FEATURES



FRR



FSR/FVR/FVM

More Powerful and Highly Efficient Engine

Known for power and efficiency, the new F-SERIES engines offer you more for less. Producing more power and torque, the Isuzu F-SERIES takes you farther on a liter of fuel. Experience superior power and efficiency on your journey with the new Isuzu F-SERIES!




Convenient Access

Built-in step board and steel vertical long grip designed for easier and safer cab entrance/exit.



Aerodynamics

The F-SERIES trucks are manufactured with efficient corners and roof design reducing drag and wind noise, preventing undesired lift forces and other causes of aerodynamic instability at high speeds.

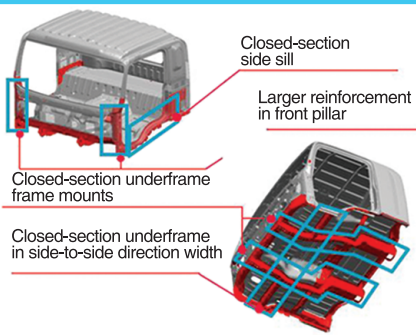

Safety on board

Safety is first, second and third with the Isuzu F-SERIES. Minimizing risk of accidents, the Isuzu F-SERIES is equipped with a high rigidity cab, reducing blind spots and offering superior direct visibility to the driver. Designed with reinforced side impact beams, the Isuzu F-SERIES provides both driver and passenger the safety and peace of mind that they deserve.




Clean Machine

Designed to reduce fuel consumption and CO₂ emissions, the Isuzu F-SERIES is Euro II compliant, helping achieve a cleaner and safer environment.




DIMENSIONS, WEIGHTS AND PERFORMANCE

FRR/FSR/FVR

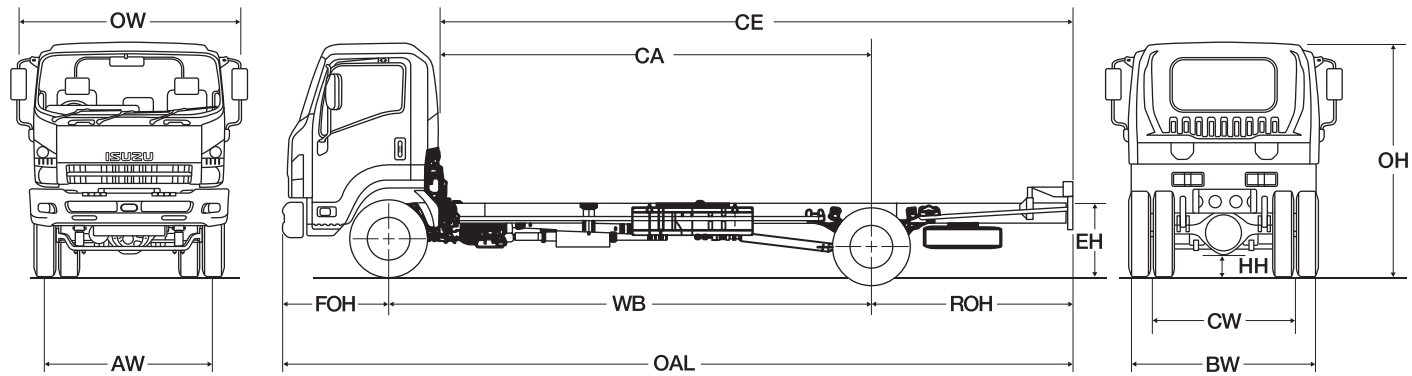

FVM

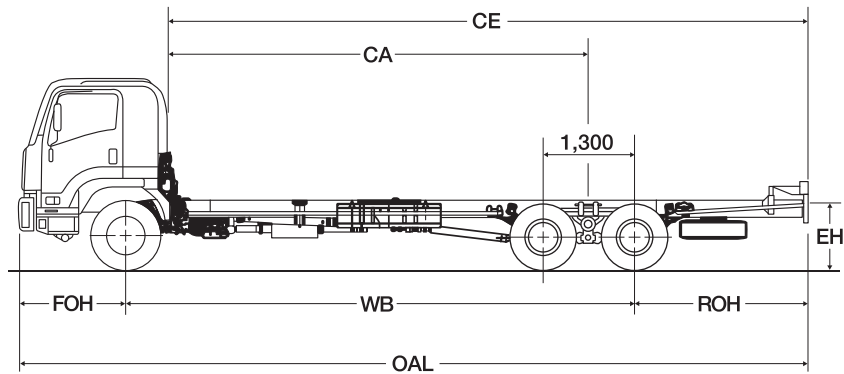

DIMENSIONS (mm)

Models		Min Turning Radius (mm)	OAL	WB	FOH	ROH	CE	CA	OW	AW	BW	CW	OH	HH Approx	EH Approx
Forward	FRR	7,250	7,875	4,660	1,170	2,045	6,150	4,105	2,200	1,790	2,165	1,660	2,540	190	1,150
	FSR	8,205	8,155	4,770	1,260	2,125	6,089	3,964	2,200	1,795	2,225	1,700	2,680	250	1,175
	FVR	8,734	9,255	5,550	1,440	2,265	7,189	4,924	2,400	1,970	2,445	1,845	2,860	235	1,250
	FVM	10,500	9,730	6,350	1,440	1,940	7,664	5,724	2,400	1,970	2,445	1,845	2,860	235	1,215

WEIGHTS (kg)

Models		Ratings	Cab Chassis Mass			
		GVW	Front	Rear	Total	Payload
Forward	FRR	10,600	2,000	1,150	3,150	7,450
	FSR	11,000	2,370	1,445	3,815	7,185
	FVR	15,000	2,940	1,900	4,840	10,160
	FVM	25,000	3,190	3,430	6,620	18,380

PERFORMANCE


Models		Max. Gradeability at Max. GVW (tan Ø) %	Max. Speed (km/h)
Forward	FRR	40	128
	FSR	37	117
	FVR	31	102
	FVM	21	96

REAR BODY APPLICATIONS

FRR/FSR/FVR




DUMP TRUCK

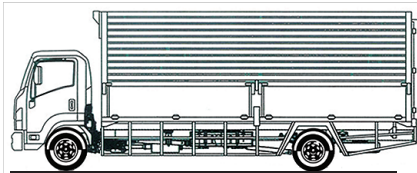


WING VAN




FUEL TANKER

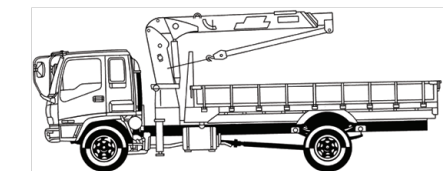

CRANE/CARGO

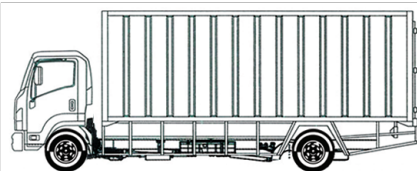


STEEL/ALUMINUM VAN

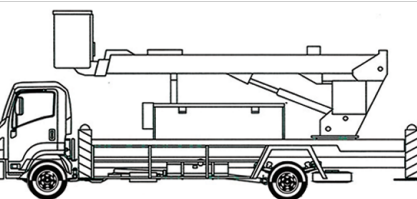


AERIAL PLATFORM


FVM

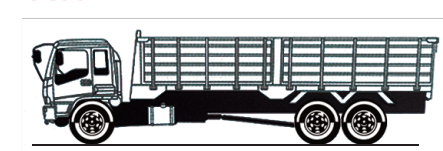

STAKE TRUCK

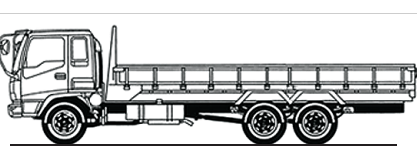

DROPSIDE CARGO

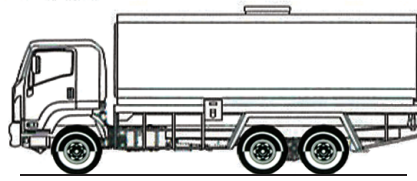

FUEL TANKER